


Document type: PDS	Document No. 13T-PDS	
Status: Issued	Product Data Sheet: 13 Tons Bolt tightening kit	
Prepared by: Erik Conradi	Created Date: 17.10.17	Last Modified Date: -
Approved by: Aksel Bråthen	Version: 1	Revision: -



Key Features

- 13 Tons Hollow bore cylinder
- Small 700 Bar Two-stage hand pump
- CIS-tagged Hose Kit with couplers
- 18Kg packed in Pelicase with wheels.
- Laminated pressure graph.

Kit Design

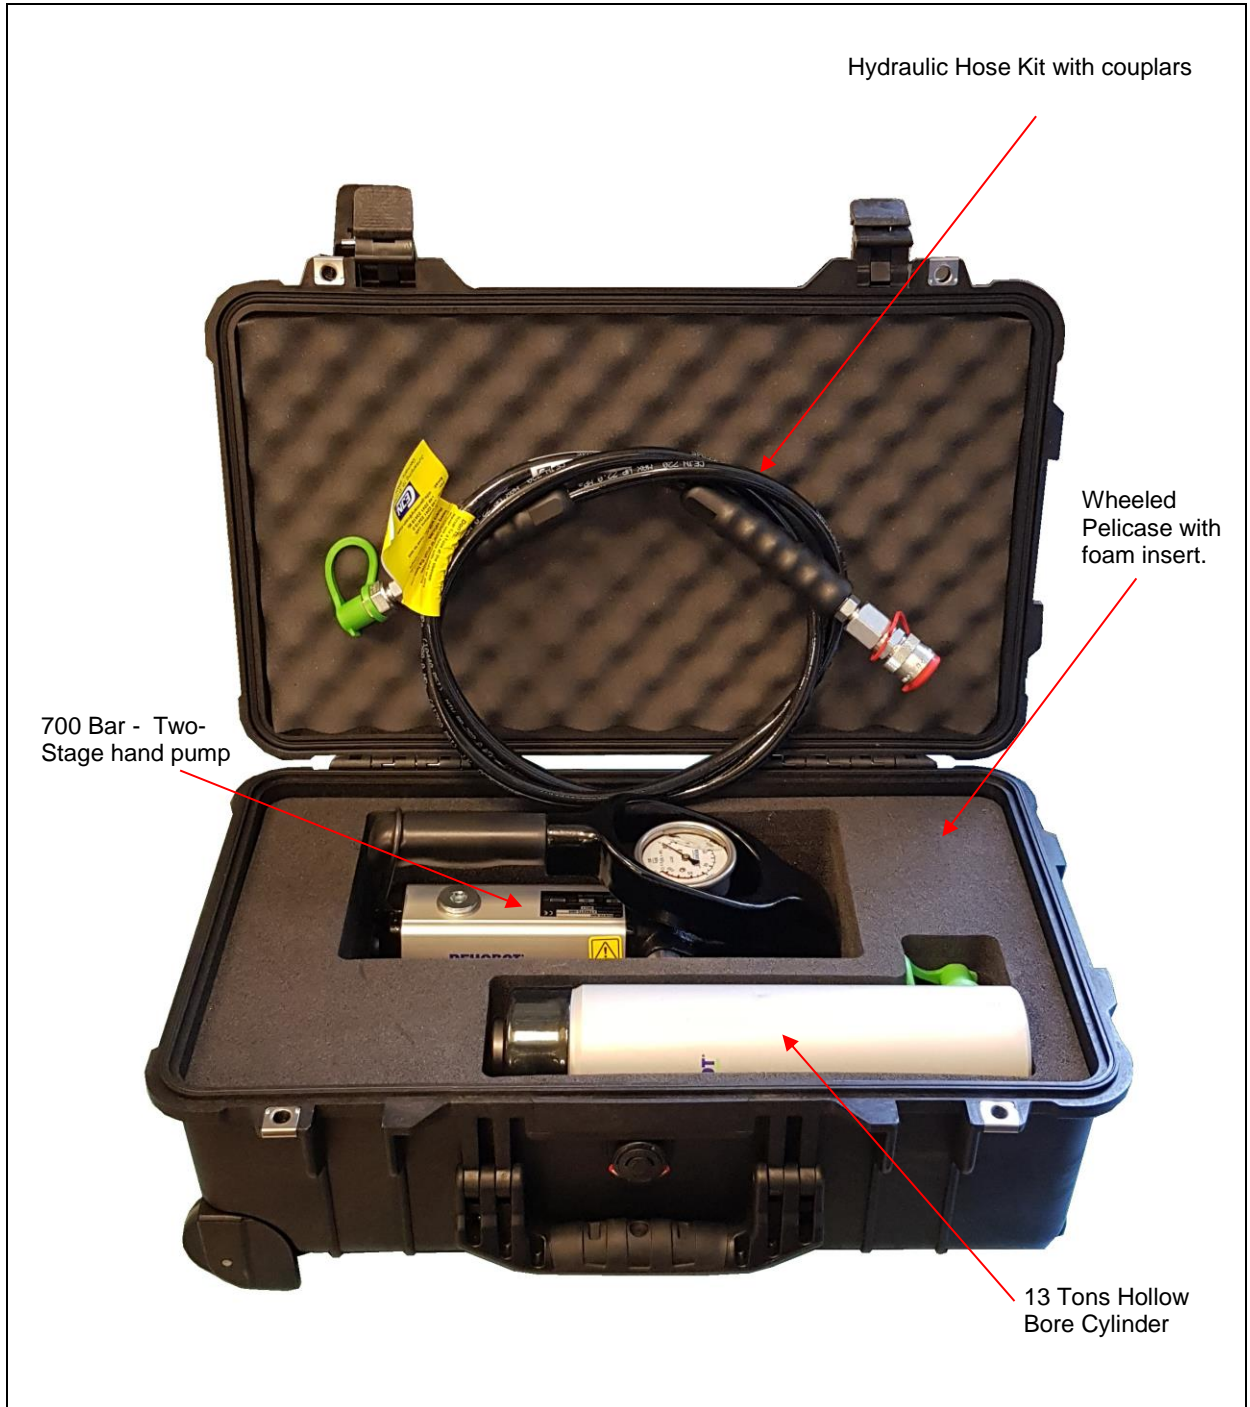

Tool Specifications

Pump

- 700Bar / 70MPa
- Two stage
- 300cm³ oil reservoir
- 320X110X170mm – 6 kilo
- Female coupling



Hose

- 2 meter black hose
- 700Bar / 70MPa working pressure
- Bend stiffener in both ends
- Male & Female Couplings
- CIS-tagged for electronic hose life time logging



Cylinder

- 13 Tons aluminum hollow bore cylinder.
 - Two size options
- 22mm hollow diameter
- Cylinders are protected by a support plate at the bottom.

Cylinder CHFA132

- 52mm stroke
- 80mm diameter
- 165mm height
- 2,3kg



Cylinder CHFA136

- 153mm stroke
- 80mm diameter
- 310mm height
- 4,0kg

Transport Case

- Wheeled Pelicase™ 1510 with sturdy cutout foam
- Shock-, dust- and waterproof (IP67, Def Stan 81-41/STANAG 4280)
- 559x351x229mm
- 6,2 kilo



The kit-type is also available in 18, 26 and 37 tons